




NORMALNI POPREČNI PROFIL KANALIZACIJSKOG ROVA U ZELENOM POJASU

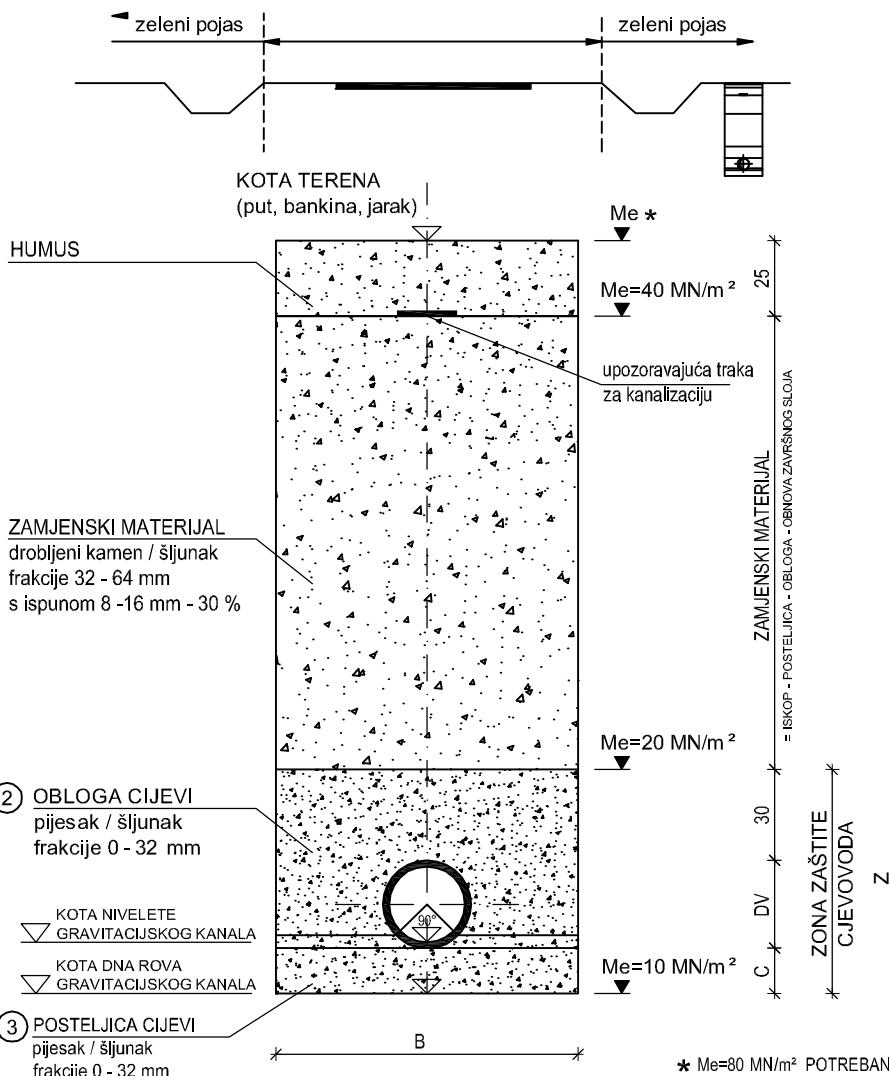

TABLICA ZA PEHD CIJEVI

| DN (mm) | ŠIRINA ROVA B (cm) | VISINA POSTELJICE C (cm) | VISINA ZONE ZAŠTITE CJEVOVODA Z (cm) | POVRŠINA | | | |
|------------|-----------------------------|-----------------------------------|---|--------------------------|-----------------------------------|------------------------------------|--|
| | | | | ZxB (m ²) | CIJEV (1) (m ²) | OBLOGA (2) (m ²) | POSTELJICA (3) (m ²) |
| 90 | 60 | 15 | 54 | 0.324 | 0.006 | 0.318 | 0.090 |
| 110 | 60 | 15 | 56 | 0.336 | 0.010 | 0.326 | 0.090 |
| 125 | 60 | 15 | 58 | 0.348 | 0.012 | 0.336 | 0.090 |
| 160 | 60 | 15 | 61 | 0.366 | 0.020 | 0.346 | 0.090 |

* Me=80 MN/m² POTREBAN KOD
MAKADAMSKOG PUTA, A U OSTALIM
UVJETIMA (BANKINA, CESTOVNI
JARAKI) DOVOLJNO JE Me=40 MN/m²

TABLICA ZA PP KORUGIRANE CIJEVI

| DN (mm) | S (cm) | Dv (cm) | ŠIRINA ROVA B (cm) | VISINA POSTELJICE C (cm) | VISINA ZONE ZAŠTITE CJEVODOVA Z (cm) | POVRŠINA | | | |
|------------|-----------|------------|-----------------------------|-----------------------------------|---|--------------------------|---------------------------------|----------------------------------|--------------------------------------|
| | | | | | | ZxB (m ²) | CIJEV ① (m ²) | OBLOGA ② (m ²) | POSTELJICA ③ (m ²) |
| 300 | 19,70 | 339.4 | 100 | 15 | 79 | 0.789 | 0.090 | 0.549 | 0.150 |

| | | | | | |
|---|--|-------------------------------------|--|----------------|------|
| INVESTITOR: | OPĆINA PETERANEC Ulica Matije Gupca 13, Peteranec | Projektant: Projektant suradnik: | Davor Štrbenac, dipl.ing.grad. Mladen Novotny, dipl.ing.grad. | BROJ PROJEKTA: | 2720 |
| NACRT: NORMALNI PREGLED KANALIZACIJSKOG BOČA U ZELENOM POJASU | | | | PRILOG: | 125 |
| | | | | | |